



**PRODUCT CATALOG**

# Table of Contents

## SAFETY STORAGE CABINETS

|   |    |
|---|----|
| Features & Specifications .....                                       | 3  |
| Containment Classification & Product Information .....                | 4  |
| Flammable Storage - Cans .....  | 5  |
| Flammable Storage - Drums .....                                       | 6  |
| Acid & Corrosive Storage / Polyethylene Cabinets .....                | 7  |
| Paint & Ink Storage / Spill Containment Cabinet .....                 | 8  |
| Hazardous Waste Storage / Pesticide Storage .....                     | 9  |
| Laboratory Storage & Wall Mount & Stackable Storage .....             | 10 |
| Aluminum LP / Oxygen Gas Cylinder Storage / Vertical LP Storage ..... | 11 |
| Medical Gas Storage Cabinets .....                                    | 12 |
| Outdoor Weatherproof Flammable Storage .....                          | 13 |
| Industrial & Commercial Storage / Mobile Storage .....                | 14 |
| Stainless Steel Storage .....   | 15 |
| Custom Cabinets .....   | 18 |

## CHEMICAL STORAGE BUILDINGS

|   |    |
|---|----|
| Hazmat Chemical Storage .....                       | 19 |
| Agri-Chemical Storage .....                         | 20 |
| Outdoor Storage - Buildings & Lockers .....         | 21 |
| Building Accessories .....                          | 22 |
| Building Ramps & Heavy Duty Drum SpillStation ..... | 24 |
| Custom Storage Building .....                       | 30 |

## Code Compliance

|                |    |  |    |
|----------------|----|--|----|
| Cabinets ..... | 25 | Outdoor Safety Storage Buildings ..... | 29 |
|----------------|----|--|----|

**SECURALL . . . FIRST IN QUALITY, PRICE, DELIVERY**

**Manufactured in the U.S.A.**



Specifications are subject to change without notice

Copyright 2023

# Features & Specifications



**Double Wall Construction with 1 1/2" Air Space**  
(NFPA 30, OSHA, FM 6050)

**Large Warning Label, (also available in French and Spanish)**  
(NFPA 30, OSHA 1910.106, FM 6050)



**Fusible Link Assembly on Self-Closing Models**



**Flush Mounted Locking Handle**



**Non-sparking closure w/ 3-Point, Self-Latching Doors**  
(NFPA 30, OSHA 1910.106, FM 6050)




**Structurally Reinforced 18-Gauge All-Welded Construction**  
(NFPA 30, OSHA 1910.106, FM 6050)



**Static Ground Connections**  
(FM 6050, OSHA, NFPA 70)



**Continuous Piano Hinge**



**Leak Proof Sill 2" Deep, Prevents Leakage in the Event of Accidental Spills**  
(NFPA 30, OSHA 1910.106, FM 6050)

**Finished in Chemical, UV & Impact Resistant Urethane**



**Adjustable Zinc Plated Leveling Legs**

## SAFETY BEGINS WITH SECURALL®

SECURALL®'s innovative design features and conscientious customer service continue to be the benchmark of excellence in the safety storage industry.

Our dedication to quality, delivery and manufacturing efficiencies has established SECURALL® as an industry leader in safety storage cabinets and buildings, while our commitment to customers' needs has resulted in the most comprehensive line of safety storage products available.

If you have a special situation that requires a customized design, we will welcome the opportunity to work with you to provide a safe storage solution.

Make SECURALL® your primary source for quality safety storage and security products.

# Containment Classifications



## NFPA FLAMMABLE & COMBUSTIBLE CLASSES

| FLAMMABLES | Flash Point                 | Boiling Point | COMBUSTIBLES | Flash Point                  | Boiling Point |
|------------|-----------------------------|---------------|--------------|------------------------------|---------------|
| Class IA   | <73F (22.8C)                | <100F (37.8C) | Class IIA    | <100F (37.8C) and <140F(60C) | -             |
| Class IB   | <73F (22.8C)                | <100F (37.8C) | Class IIIB   | <140F (60C) and <200F(93C)   | -             |
| Class IC   | <73F (22.8C) and <100F(37C) | -             | Class IIIC   | <200F (93C)                  | -             |

A maximum of 120 - gallons of Class I, Class II, and Class IIIA liquids may be stored in a single storage cabinet.<sup>1</sup> The number of cabinets in a single fire area may not exceed 3. Proper storage of additional cabinets within a single fire area is limited to groups no larger than 3, so long as a minimum of 100ft separation exists between all groups. The maximum number of cabinets in any one group may be increased to 6 if the cabinets are stored in an Industrial Occupancy facility that is equipped with an automatic sprinkler system meeting NFPA 13 standards for installation.<sup>1</sup>

SECURALL® utilizes a 3-point, non-sparking button latch rod system that provides the ultimate in security, safety and compliance. Since all work surfaces are not level, each cabinet is equipped with (4) **Leveling Legs** to level the cabinet and doors for successful closure every time (see *Figure 1*).

Additionally, all **Self-Close Door** models are equipped with Fusible Links to hold doors open while accessing contents of cabinet. When properly used, links are designed to melt at 165°F, which allows the doors to close automatically in case of fire (see *Figure 2*).

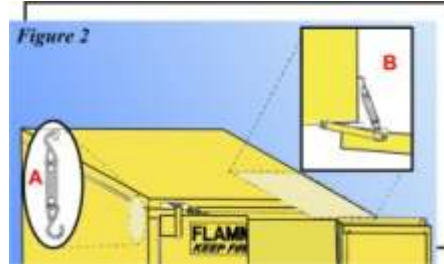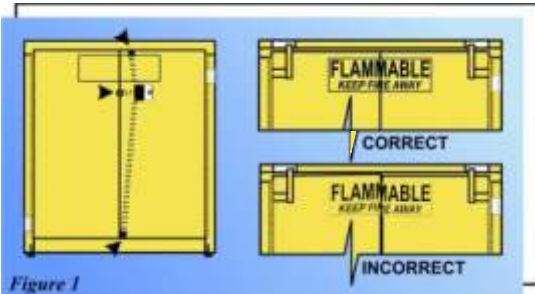

- A:** Insert one end of fusible link hook into desired punch-hole
- B:** Attach other end of link assembly as indicated in


## Paint

The interior and exterior finish consists of an aliphatic polyurethane finish. This polyurethane coating has chemical properties to withstand salt spray, chemical rub, fading due to UV exposure and other tests performed on epoxy paints. Urethane is more durable under conditions when moving items in and out of the cabinet as it resists chipping and peeling. Unless some other color is specified, cabinets will ship in designated standard color. For **custom colors**, customer must provide a paint chip.




## Door Configuration

**Self-Latch, Standard 2-Door**  
Denoted as a 100 series model no.



**Self-Close, Self-Latch Sliding Door**  
Denoted as a 200 series model no.

**Self-Close, Self-Latch Safe-T-Door**  
Denoted as a 300 series model no.

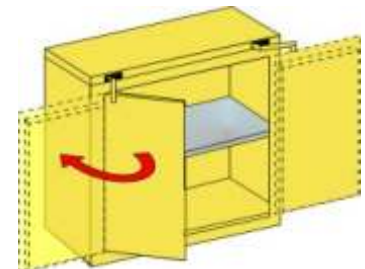

# Flammable Storage - Cans

Keep flammable liquids close to the work area in a safe and organized way while limiting employee exposure with SECURALL® Safety Storage Cabinets. You can choose from a large selection of sizes from 4 to 90-gallon capacities. These cabinets are designed to meet safety requirements whenever a job involves the handling of flammable or combustible liquids. Smaller cabinets are convenient where space is limited. Standard color is Yellow.

**All cabinets comply with current OSHA regulations and are designed in accordance with the standards of NFPA Code 30.**



Model #A230



Model #A305




★ Model #A145

## CABINETS FOR STORING FLAMMABLES IN SAFETY CANS/CONTAINERS

| Model No. | Test Lab Approv. | Description                                 | No. of Shelves | Exterior Dim. (H" x W" x D") | Approx. Ship Wt. | Addtn'l Shelf | Approx. Ship Wt. |
|-----------|------------------|---|----------------|------------------------------|------------------|---------------|------------------|
| A102      | *~               | 4 Gal. Self-Latch Standard Door             | 1              | 22 x 17 x 17                 | 75 lbs.          | S17-05        | 3 lbs.           |
| A302      | *~               | 4 Gal. Self-Close, Self-Latch Safe-T-Door   | 1              | 24 x 17 x 17                 | 82               | S17-05        | 3                |
| A105      | FM*~             | 12 Gal. Self-Latch Standard Door            | 1              | 35 x 24 x 18                 | 138              | S1-05         | 5                |
| A305      | FM*~             | 12 Gal. Self-Close, Self-Latch Safe-T-Door  | 1              | 37 x 24 x 18                 | 148              | S1-05         | 5                |
| A110      | FM*~             | 16 Gal. Self-Latch Standard Door            | 1              | 44 x 24 x 18                 | 164              | S1-05         | 5                |
| A310      | FM*~             | 16 Gal. Self-Close, Self-Latch Safe-T-Door  | 1              | 46 x 24 x 18                 | 174              | S1-05         | 5                |
| A130      | FM*~             | 30 Gal. Self-Latch Standard 2-Door          | 1              | 44 x 43 x 18                 | 247              | S2-05         | 12               |
| A230      | FM*~             | 30 Gal. Self-Close, Self-Latch Sliding Door | 1              | 44 x 43 x 18                 | 252              | S2-05         | 12               |
| A330      | FM*~             | 30 Gal. Self-Close, Self-Latch Safe-T-Door  | 1              | 46 x 43 x 18                 | 267              | S2-05         | 12               |
| A131      | FM*~             | 30 Gal. Self-Latch Standard 2-Door          | 1              | 35 x 36 x 24                 | 220              | S15-05        | 13               |
| A231      | *~               | 30 Gal. Self-Close, Self-Latch Sliding Door | 1              | 35 x 36 x 24                 | 223              | S15-05        | 13               |
| A331      | FM*~             | 30 Gal. Self-Close, Self-Latch Safe-T-Door  | 1              | 37 x 36 x 24                 | 235              | S15-05        | 13               |
| A145★     | FM*~             | 45 Gal. Self-Latch Standard 2-Door          | 2              | 65 x 43 x 18                 | 337              | S2-05         | 12               |
| A245      | FM*~             | 45 Gal. Self-Close, Self-Latch Sliding Door | 2              | 65 x 43 x 18                 | 342              | S2-05         | 12               |
| A345      | FM*~             | 45 Gal. Self-Close, Self-Latch Safe-T-Door  | 2              | 67 x 43 x 18                 | 357              | S2-05         | 12               |
| A160      | FM*~             | 60 Gal. Self-Latch Standard 2-Door          | 2              | 65 x 31 x 31                 | 372              | S3-05         | 17               |
| A260      | *~               | 60 Gal. Self-Close, Self-Latch Sliding Door | 2              | 65 x 31 x 31                 | 377              | S3-05         | 17               |
| A360      | FM*~             | 60 Gal. Self-Close, Self-Latch Safe-T-Door  | 2              | 67 x 31 x 31                 | 394              | S3-05         | 17               |
| A190      | FM*~             | 90 Gal. Self-Latch Standard 2-Door          | 2              | 65 x 43 x 31                 | 443              | S4-05         | 21               |
| A290      | *~               | 90 Gal. Self-Close, Self-Latch Sliding Door | 2              | 65 x 43 x 31                 | 448              | S4-05         | 21               |
| A390      | FM*~             | 90 Gal. Self-Close, Self-Latch Safe-T-Door  | 2              | 67 x 43 x 31                 | 473              | S4-05         | 21               |

## Caster Assembly



Casters are constructed of heavy gauge galvanized steel; each assembly provides a wide, sturdy base and enables cabinets to be moved from one area to another safely, without tipping over. Each assembly set comes with one pair of rigid locking casters and one pair of swivel locking casters. Casters are available in colors to match all SECURALL® Safety Cabinet colors.



## CABINET ACCESSORIES

| Model No. | Description                           | Approx. Shp. Wt. |
|-----------|---------------------------------------|------------------|
| CA18      | Caster Assembly for cabinets 18" deep | 30               |
| CA31      | Caster Assembly for cabinets 31" deep | 36               |

\* Complies with OSHA Regulations  
 FM Factory Mutual Tested and Approved  
 ~ Designed in Accordance with Specifications set forth by the National Fire Protection Association

# Flammable Storage - Drums

Flammable drum storage cabinets offer safe, convenient and centralized storage for flammables and are available in models to store drums in both vertical and horizontal positions. Vertical Cabinets have ball bearing Roller Bottoms for easy placement and removal of 55-gallon drums. Also, depending on the model, 1 to 12 5-gallon safety cans can be stored on the provided 18-gauge galvanized steel shelving. Horizontal Cabinets store one 55-gallon drum and one 5-gallon safety can and have tracks to guide the Drum Cradle into position (Drum cradles sold separately). Door styles include manual, sliding or self-closing. Self-closing doors have fusible link that melts at 165°F allowing the door to automatically close. Cabinets meet OSHA and NFPA Code 30 regulations. Standard color is Yellow.

Capacities may vary depending on size and shape of Container.



Model #V260

\* Model #V1110



Model #H160

## CABINETS FOR STORING FLAMMABLES IN DRUMS

| Model No. | Test Lab Approv. | Description                                      | No. of Shelves | Exterior Dim. (H" x W" x D") | Approx. Ship Wt. | Addn'l Shelf | Approx. Ship Wt. |
|-----------|------------------|--|----------------|------------------------------|------------------|--------------|------------------|
| H160      | FM*~             | 60 Gal. Hor. Self-Latch Standard 2-Door          | -              | 50 X 34 X 50                 | 384 lbs.         | -            | - lbs.           |
| H260      | *~               | 60 Gal. Hor. Self-Close, Self-Latch Sliding Door | -              | 50 X 34 X 50                 | 389              | -            | -                |
| H360      | FM*~             | 60 Gal. Hor. Self-Close, Self-Latch Safe-T-Door  | -              | 52 X 34 X 50                 | 414              | -            | -                |
| *V160     | FM*~             | 65 Gal. Ver. Self-Latch Standard 2-Door          | 1              | 65 X 31 X 31                 | 382              | S9-05        | 16               |
| *V260     | *~               | 65 Gal. Ver. Self-Close, Self-Latch Sliding Door | 1              | 65 X 34 X 34                 | 400              | S9-N         | 20               |
| *V360     | FM*~             | 65 Gal. Ver. Self-Close, Self-Latch Safe-T-Door  | 1              | 67 X 31 X 31                 | 404              | S9-05        | 16               |
| *V175     | FM*~             | 75 Gal. Ver. Self-Latch Standard 2-Door          | 1              | 65 X 43 X 31                 | 419              | S2-05        | 12               |
| *V275     | *~               | 75 Gal. Ver. Self-Close, Self-Latch Sliding Door | 1              | 65 X 43 X 31                 | 424              | S2-05        | 12               |
| *V375     | FM*~             | 75 Gal. Ver. Self-Close, Self-Latch Safe-T-Door  | 1              | 67 X 43 X 31                 | 448              | S2-05        | 12               |
| *V1110 *  | FM*~             | 120 Gal. Ver. Self-Latch Standard 2-Door         | 1              | 65 X 56 X 31                 | 581              | S5-05        | 21               |
| *V3110    | FM*~             | 120 Gal. Ver. Self-Close, Self-Latch Safe-T-Door | 1              | 67 X 56 X 31                 | 610              | S5-05        | 21               |
| *V1500    | FM*~             | 115 Gal. Ver. Self-Latch Standard 2-Door         | 2              | 65 X 56 X 31                 | 600              | S19-05       | 10               |

\*All V models come with Roller Bottoms

## Drum Cradle & Ramp

Model # BR24  
23"H x 24"W x 1"D



Heavy-duty steel ramp has reinforced side edging, painted in 2-part durable urethane and coated with non-slip stripping for grip.

- 1,000 lb. capacity permits one person to handle heavy 30 or 55-Gallon drums
- Cradle features ALL WELDED steel construction
- Rolls smoothly on 4 inch wheels



Model #DC6  
19.5"H X 19"W X 33"D

## CABINET ACCESSORIES

| Model No. | Description                             | Approx. Shp. Wt. |
|-----------|---|------------------|
| DC6       | Drum Cradle for Horizontal Drum Cabinet | 50 Lbs.          |
| BR24      | Drum Cabinet Ramp                       | 30               |

# Acid & Corrosive Storage



Model #C124

You can keep all acids safe and at hand with SECURALL® Acid/Corrosive Storage Cabinets for both flammable and nonflammable corrosives. Cabinets are finished in corrosive-resistant two-part urethane. The leak tight sump and painted galvanized steel shelves of these cabinets are equipped with removable corrosive-resistant polyethylene trays to contain accidental spills. All models include a polyethylene sheet liner on the sump and 24-gallon models include liner on tray-top.

**Cabinet by itself is not recommended for the storage of Nitric or Sulfuric Acids unless used in conjunction with PE3045 Polyethylene Cabinet as pictured to right & specified below.** Large warning label reads: CAUTION CORROSIVES. Cabinets meet OSHA and NFPA Code 30 regulations. Standard color is Blue.



★ Model #C145 shown with Model #PE3045

**24-Gallon Cabinet has a leak-proof tray top, which can completely contain a 5-pint spill.**

**24-Gallon Model also comes with a standard kick recess, measuring 3 7/8"H by 4"D.**

## CABINETS FOR STORING CORROSIVES/FLAMMABLES/ACIDS

| Model No. | Test Lab Approv. | Description                                     | No. of Shelves | Exterior Dim. (H" x W" x D") | Approx. Ship Wt. | Addtn'l Shelf | Addtn'l Poly Tray | Approx. Ship Wt. |
|-----------|------------------|---|----------------|------------------------------|------------------|---------------|-------------------|------------------|
| * C124    | FM*~             | 24 Gal. Self-Latch Standard 2-Door              | 1              | 36 x 35 x 22                 | 207 lbs.         | C1-05         | P1                | 11 lbs.          |
| * C224    | *~               | 24 Gal. Self-Close, Self-Latch Sliding Door     | 1              | 36 x 35 x 22                 | 212              | C1-05         | P1                | 11               |
| C130      | FM*~             | 30 Gal. Self-Latch Standard 2-Door              | 1              | 44 x 43 x 18                 | 270              | C2-05         | P2                | 10               |
| C230      | *~               | 30 Gal. Self-Close, Self-Latch Sliding Door     | 1              | 44 x 43 x 18                 | 275              | C2-05         | P2                | 10               |
| C330      | FM*~             | 30 Gal. Self-Close, Self-Latch Safe-T-Door      | 1              | 46 x 43 x 18                 | 290              | C2-05         | P2                | 10               |
| C145 ★    | FM*~             | 45 Gal. Self-Latch Standard 2-Door              | 2              | 65 x 43 x 18                 | 363              | C2-05         | P2                | 10               |
| C245      | *~               | 45 Gal. Self-Close, Self-Latch Sliding Door     | 2              | 65 x 43 x 18                 | 368              | C2-05         | P2                | 10               |
| C345      | FM*~             | 45 Gal. Self-Close, Self-Latch Safe-T-Door      | 2              | 67 x 43 x 18                 | 383              | C2-05         | P2                | 10               |
| C160      | FM*~             | 60 Gal. Self-Latch Standard 2-Door              | 2              | 65 x 31 x 31                 | 396              | C3-05         | P3                | 12               |
| C260      | *~               | 60 Gal. Self-Close, Self-Latch Sliding Door     | 2              | 65 x 31 x 31                 | 401              | C3-05         | P3                | 12               |
| C360      | FM*~             | 60 Gal. Self-Close, Self-Latch Safe-T-Door      | 2              | 67 x 31 x 31                 | 418              | C3-05         | P3                | 12               |
| PE3045    |                  | Polyethylene Cabinet for Harsh Acids/Corrosives | -              | 18 x 38 x 13                 | 32               | -             | -                 | -                |

\*24 Gal. models come with Tray Top and Kick Recess

# Polyethylene Cabinets

Blue **Polyethylene Cabinets** are designed to fit inside a SECURALL® Acid/Corrosive Safety Cabinet, or may be used as a stand-alone counter top cabinet. Cabinets are constructed of high-density (.187" thick) polyethylene, which allows for the safe storage of acids and corrosives near your work area (including nitric and sulfuric acids). Double-wall recessed doors help to control vapors. Fit two Polyethylene Cabinet in a 30-gallon cabinet or three in a 45-gallon cabinet. Labels read: "ACIDS/CORROSIVES" and display the international symbol for Corrosive Material. Cabinets shipped assembled and ready to use.



Model #PE3045

## Polyethylene Cabinet for Harsh Acids/Corrosives

| Model No. | Exterior Dim. (H" x W" x D") | Approx. Ship Wt. |
|-----------|------------------------------|------------------|
| PE3045    | 18 x 38 x 13                 | 32 lbs.          |

\* Complies with OSHA Regulations  
 - Designed in Accordance with Specifications set forth by the National Fire Protection Association

FM Factory Mutual Tested and Approved

★ Best Seller!

# Paint & Ink Storage



★ Model #P160



Model #P140

Safety storage cabinets for 1-gallon paint cans are available in 20, 40, 60 and 120-gallon\* capacities and finished in two-part urethane paint. Warning label reads: "FLAMMABLE KEEP FIRE AWAY." Cabinets are perfect for print shops or auto body repair and are available in manual, sliding or self-closing door models. Standard colors are Red or Yellow.

## CABINETS FOR STORING FLAMMABLE PAINTS/INKS

| Model No. | Test Lab Approv. | Description                                  | No. of Shelves | Capacity       | Exterior Dim. (H" x W" x D") | Approx. Ship Wt. | Addn'l Shelf | Approx. Ship Wt. |
|-----------|------------------|--|----------------|----------------|------------------------------|------------------|--------------|------------------|
| P120      | FM*-             | 20 Gal. Self-Latch Standard 2-Door           | 2              | 20/1 Gal. Cans | 44 x 24 x 18                 | 169 lbs.         | S1-05        | 5 lbs.           |
| P320      | FM*-             | 20 Gal. Self-Close, Self-Latch Safe-T-Door   | 2              | 20/1 Gal. Cans | 46 x 24 x 18                 | 179              | S1-05        | 5                |
| P140      | FM*-             | 40 Gal. Self-Latch Standard 2-Door           | 3              | 40/1 Gal. Cans | 44 x 43 x 18                 | 271              | S2-05        | 12               |
| P240      | FM*-             | 40 Gal. Self-Close, Self-Latch Sliding Door  | 3              | 40/1 Gal. Cans | 44 x 43 x 18                 | 276              | S2-05        | 12               |
| P340      | FM*-             | 40 Gal. Self-Close, Self-Latch Safe-T-Door   | 3              | 40/1 Gal. Cans | 46 x 43 x 18                 | 291              | S2-05        | 12               |
| P160★     | FM*-             | 60 Gal. Self-Latch Standard 2-Door           | 5              | 60/1 Gal. Cans | 65 x 43 x 18                 | 373              | S2-05        | 12               |
| P260      | FM*-             | 60 Gal. Self-Close, Self-Latch Sliding Door  | 5              | 60/1 Gal. Cans | 65 x 43 x 18                 | 378              | S2-05        | 12               |
| P360      | FM*-             | 60 Gal. Self-Close, Self-Latch Safe-T-Door   | 5              | 60/1 Gal. Cans | 67 x 43 x 18                 | 393              | S2-05        | 12               |
| P1120     | FM*-             | 120 Gal. Self-Latch Standard 2-Door          | 5              | 120 Gallons    | 65 x 31 x 31                 | 414              | S3-05        | 17               |
| P2120     | *~               | 120 Gal. Self-Close, Self-Latch Sliding Door | 5              | 120 Gallons    | 65 x 31 x 31                 | 419              | S3-05        | 17               |
| P3120     | FM*-             | 120 Gal. Self-Close, Self-Latch Safe-T-Door  | 5              | 120 Gallons    | 67 x 31 x 31                 | 436              | S3-05        | 17               |

\*Capacity may vary based on container shape and size

# Spill Containment Cabinet



Model #SCC172



Model #SCC242



Model #SCC132

- All-welded 18-gauge extra strength construction.
- Mobile cabinet features four 4" wheels.
- Flush mounted handle provides easy and fast fingertip operation.
- Cabinets have 3-point button lock self-latching doors for extra safety.
- All cabinets come with spring loaded adjustable shelves.
- Custom interiors are available to fit your specific needs.

SECURALL®'s Single Wall Spill Containment Cabinets make controlling unwanted spills easier than ever, because you can keep all of your spill control supplies ready and in one organized location.

You can choose from four sizes. Our larger full size cabinets are stationary, and our smaller mobile model allows you to respond to cleanups by wheeling your supplies to the spill area. The wall-mounted cabinet keeps all your spill control supplies available without taking up floor space.

## CABINETS FOR STORING FLAMMABLE PAINTS/INKS

| Model No. | Description                  | No. Of Shelves | Storage Capacity | Dimensions (H x W x D)in. | Approx. Shp. Wt. |
|-----------|------------------------------|----------------|------------------|---------------------------|------------------|
| SCC242    | Counter High Mobile Cabinet  | 2              | 21 Cubic Feet    | 42 x 36 x 24              | 200 lbs.         |
| SCC172    | Full Size Stationary Cabinet | 4              | 27 Cubic Feet    | 72 x 36 x 18              | 264              |
| SCC272    | Full Size Stationary Cabinet | 4              | 36 Cubic Feet    | 72 x 36 x 24              | 353              |
| SCC132    | Wall-mounted Cabinet         | 2              | 6 Cubic Feet     | 32 x 26 x 12              | 115              |

## Cabinet Features



Wall Mount Brackets



Easy-move 4" casters



# Hazardous Waste Storage

The Resource Conservation and Recovery Act's (RCRA) 1984 amendments made it mandatory that hazardous waste be collected and disposed of properly. SECURALL® offers the largest capacity drum storage cabinets in the industry. All Hazardous Waste Drum Cabinets are equipped with ball bearing **Roller Bottoms** for easy loading of heavy drums, and an 18-gauge galvanized steel shelf that holds 5-gallon containers. Standard color is Yellow.



★ Model #W1080

## CABINETS FOR STORING HAZARDOUS WASTE IN DRUMS - indoor use

| Model No. | Test Lab Approv. | Description                                 | No. of Shelves | Exterior Dim. (H" x W" x D") | Approx. Ship Wt. | Addtn'l Shelf | Approx. Ship Wt. |
|-----------|------------------|---|----------------|------------------------------|------------------|---------------|------------------|
| W1040     | FM*~             | 60 Gal. Self-Latch Standard 2-Door          | 1              | 65 x 31 x 31                 | 382 lbs.         | S9-05         | 7 lbs.           |
| W2040     | *~               | 60 Gal. Self-Close, Self-Latch Sliding Door | 1              | 65 x 34 x 34                 | 400              | S9-N          | 10               |
| W3040     | FM*~             | 60 Gal. Self-Close, Self-Latch Safe-T-Door  | 1              | 67 x 31 x 31                 | 404              | S9-05         | 7                |
| W1075     | FM*~             | 75 Gal. Self-Latch Standard 2-Door          | 1              | 65 x 43 x 31                 | 419              | S4-05         | 21               |
| W2075     | *~               | 75 Gal. Self-Close, Self-Latch Sliding Door | 1              | 65 x 43 x 31                 | 424              | S4-05         | 21               |
| W1080     | FM*~             | 120 Gal. Self-Latch Standard 2-Door         | 1              | 65 x 56 x 31                 | 581              | S5-05         | 16               |
| W3080     | FM*~             | 120 Gal. Self-Close, Self-Latch Safe-T-Door | 1              | 67 x 56 x 31                 | 610              | S5-05         | 16               |

All cabinets come with Roller Bottoms



★ Model #W3045

## CABINETS FOR STORING HAZARDOUS WASTE IN CANS - indoor use

| Model No. | Test Lab Approv. | Description                                 | No. of Shelves | Exterior Dim. (H" x W" x D") | Approx. Ship Wt. | Addtn'l Shelf | Approx. Ship Wt. |
|-----------|------------------|---|----------------|------------------------------|------------------|---------------|------------------|
| W1045     | FM*~             | 45 Gal. Self-Latch Standard 2-Door          | 2              | 65 x 43 x 18                 | 337 lbs.         | S2-05         | 12lbs.           |
| W2045     | *~               | 45 Gal. Self-Close, Self-Latch Sliding Door | 2              | 65 x 43 x 18                 | 342              | S2-05         | 12               |
| W3045     | FM*~             | 45 Gal. Self-Close, Self-Latch Safe-T-Door  | 2              | 67 x 43 x 18                 | 357              | S2-05         | 12               |
| W1060     | FM*~             | 60 Gal. Self-Latch Standard 2-Door          | 2              | 65 x 31 x 31                 | 372              | S9-05         | 7                |
| W3060     | FM*~             | 60 Gal. Self-Close, Self-Latch Safe-T-Door  | 2              | 67 x 31 x 31                 | 394              | S9-05         | 7                |



Model #DC6

## CABINET ACCESSORIES

| Model No. | Description                           | Approx. Ship. Wt. |
|-----------|---------------------------------------|-------------------|
| DC6       | Drum Cradle                           | 50 lbs.           |
| BR24      | Drum Cabinet Ramp                     | 30                |
| CA18      | Caster Assembly for cabinets 18" deep | 30                |
| CA31      | Caster Assembly for cabinets 31" deep | 36                |

# Pesticide Storage



★ Model #Ag345

The health risks of short-term exposure to pesticides and accidental poisoning are real. SECURALL® Pesticide Cabinets provide safe, secure and controlled storage for agricultural products. Farms, nurseries, parks and recreation facilities can safely store pesticides and equipment. Pesticide Storage Cabinets help restrict the handling of pesticides to those who have been appropriately trained and authorized per EPA/WPS. You choose the model to segregate and securely store up to 120-gallons of a Class I, Class II or Class III product. Each model is equipped with 18-gauge galvanized steel shelving. Standard color is Ag Green.

Model #AG130

## CABINETS FOR STORING PESTICIDES

| Model No. | Test Lab Approv. | Description                                 | No. of Shelves | Exterior Dim. (H" x W" x D") | Approx. Ship Wt. | Addtn'l Shelf | Approx. Ship Wt. |
|-----------|------------------|---|----------------|------------------------------|------------------|---------------|------------------|
| AG105     | FM*~             | 12 Gal. Self-Latch Standard Door            | 1              | 35 x 24 x 18                 | 138 lbs.         | S1-05         | 5 lbs.           |
| AG305     | FM*~             | 12 Gal. Self-Close, Self-Latch Safe-T-Door  | 1              | 37 x 24 x 18                 | 154              | S1-05         | 5                |
| AG130     | FM*~             | 30 Gal. Self-Latch Standard 2-Door          | 1              | 44 x 43 x 18                 | 247              | S2-05         | 12               |
| AG330     | FM*~             | 30 Gal. Self-Close, Self-Latch Safe-T-Door  | 1              | 46 x 43 x 18                 | 267              | S2-05         | 12               |
| AG145     | FM*~             | 45 Gal. Self-Latch Standard 2-Door          | 2              | 65 x 43 x 18                 | 337              | S2-05         | 12               |
| AG345     | FM*~             | 45 Gal. Self-Close, Self-Latch Safe-T-Door  | 2              | 67 x 43 x 18                 | 357              | S2-05         | 12               |
| ★ AGV160  | FM*~             | 60 Gal. Self-Latch Standard 2-Door          | 1              | 65 x 31 x 31                 | 412              | S9-05         | 16               |
| ★ AGV360  | FM*~             | 60 Gal. Self-Close, Self-Latch Safe-T-Door  | 1              | 67 x 31 x 31                 | 434              | S9-05         | 16               |
| ★ AGV1110 | FM*~             | 120 Gal. Self-Latch Standard 2-Door         | 1              | 65 x 56 x 31                 | 618              | S5-05         | 17               |
| ★ AGV3110 | FM*~             | 120 Gal. Self-Close, Self-Latch Safe-T-Door | 1              | 67 x 56 x 31                 | 610              | S5-05         | 17               |

\*All AGV models come with Roller Bottoms


\* Complies with OSHA Regulations  
 ~ Designed in Accordance with Specifications set forth by the National Fire Protection Association

FM Factory Mutual Tested and Approved

# Laboratory Storage



Convenient SECURALL® Laboratory Cabinets help avoid the fire and explosion hazards of unprotected flammable liquids and chemicals. These cabinets are specifically designed to fit under most counters, allowing more counter-top workspace. Each cabinet is equipped with 18-gauge galvanized steel shelving and painted in two-part urethane for wear resistance and a durable finish. You choose from 24, 36 or 44-gallon capacity, or custom build to suit your needs. All models have non-sparking latches that are available in Self-Latching Manual Doors or Self-Closing, Self-Latching Sliding Doors. Standard color is Yellow.



All cabinets come with Standard Kick Recess 3 1/4"H x 4"D

## CABINETS FOR STORING FLAMMABLES

| Model No. | Test Lab Approv. | Description                                 | No. of Shelves | Exterior Dim. (H" x W" x D") | Approx. Ship Wt. | Addtn'l Shelf | Approx. Ship Wt. |
|-----------|------------------|---|----------------|------------------------------|------------------|---------------|------------------|
| L124      | FM*~             | 24 Gal. Self-Latch Standard 2-Door          | 1              | 35 9/16 x 35 x 22            | 199 lbs.         | LS5-05        | 12 lbs.          |
| L224      | *~               | 24 Gal. Self-Close, Self-Latch Sliding Door | 1              | 35 5/8 x 35 x 22             | 204              | LS5-05        | 12               |
| L136      | FM*~             | 36 Gal. Self-Latch Standard 2-Door          | 1              | 35 9/16 x 47 x 22            | 252              | LS10-05       | 16               |
| L236      | *~               | 36 Gal. Self-Close, Self-Latch Sliding Door | 1              | 35 5/8 x 47 x 22             | 257              | LS10-05       | 16               |
| L144      | FM*~             | 44 Gal. Self-Latch Standard, 4-Door         | 1              | 35 9/16 x 59 x 22            | 284              | LS15-05       | 22               |
| L244      | *~               | 44 Gal. Self-Close, Self-Latch Sliding Door | 1              | 35 5/8 x 59 x 22             | 289              | LS15-         | 22               |

All cabinets come standard with Rear-Wall Vents and also available in Stainless Steel

## Wall Mount & Stackable Storage



Wall Mount Bracket

Offering maximum storage in a compact size, these cabinets will hold up to 24-gallons of flammable liquids without taking up valuable floor space. Each cabinet is furnished with brackets for easy wall mounting or can be placed on a bench top and are equipped with, up to five, adjustable 18-gauge galvanized steel shelves that can be positioned to meet your specific needs. Standard color is Yellow.



★ Model #WMA124



Model #WMA112

Cabinets 18"D are also designed to stack on top of standard 30-gallon Cabinets or on top of each other. Cabinets can be secured using **Stacking Bracket** (included). They are ideal for segregating flammables and/or increasing the capacity of your current cabinet. Standard color is Yellow.

## CABINETS FOR STORING FLAMMABLES

| Model No. | Test Lab | Description                                | No. of Shelves | Exterior Dim. (H" x W" x D") | Approx. Ship Wt. | Addtn'l Shelf | Approx. Ship Wt. |
|-----------|----------|--|----------------|------------------------------|------------------|---------------|------------------|
| WMA112    | FM*~     | 12 Gal. Self-Latch Standard 2-Door         | 1              | 18 x 43 x 18                 | 163 lbs.         | S2-05         | 12 lbs.          |
| WMA312    | FM*~     | 12 Gal. Self-Close, Self-Latch Safe-T-Door | 1              | 20 x 43 x 18                 | 183              | S2-05         | 12               |
| WMA118    | FM*~     | 18 Gal. Self-Latch Standard 2-Door         | 1              | 24 x 43 x 18                 | 190              | S2-05         | 12               |
| WMA318    | FM*~     | 18 Gal. Self-Close, Self-Latch Safe-T-Door | 1              | 26 x 43 x 18                 | 210              | S2-05         | 12               |
| WMA124    | FM*~     | 24 Gal. Self-Latch Standard 2-Door         | 5              | 44 x 43 x 12                 | 227              | WMS5-05       | 8                |
| WMA324    | FM*~     | 24 Gal. Self-Close, Self-Latch Safe-T-Door | 5              | 46 x 43 x 12                 | 235              | WMS5-05       | 8                |

Model #WMA118

## CABINET SPARE PARTS & ACCESSORIES

| Model No. | Description        | Approx. Shp. Wt. | Model No. | Description      | Approx. Shp. Wt. |
|-----------|--------------------|------------------|-----------|------------------|------------------|
| 500       | Wall Mount Bracket | 12 lbs.          | 550       | Stacking Bracket | 6 lbs.           |



Model # 550  
Stacking Bracket is made from stainless steel and comes 2 per cabinet

\* Complies with OSHA Regulations  
FM Factory Mutual Tested and Approved  
~ Designed in Accordance with Specifications set forth by the National Fire Protection Association

★ Best Seller!

# Aluminum LP/Oxygen Gas Cylinder Storage



Interior racking system for horizontal cylinder storage

Non-sparking Aluminum Gas Cylinder Cabinets provide significant advantages over conventional painted steel models. Designed for outdoor storage using .125" thick aluminum construction, these heavy gauge cabinets will resist weathering and won't corrode or discolor. All-welded 12-gauge aluminum construction features expanded metal sides and doors. Welded padlock hasp is standard for controlled access. Just 1/3 the weight of painted steel units, SECURALL® aluminum models offer real savings on shipping charges. Models ship fully assembled and ready to use. Labels ship unattached to storage unit for individual placement depending on product application.

\* Full and Empty Cylinder labels sold separately.



Model #LP12S



★ Model #LP4S

## OSHA Compliant

### CABINETS FOR STORING LP AND OXYGEN GAS CYLINDERS

| Model No. | Test Lab Approv. | Description                         | No. of Racks | Capacity                    | Exterior Dim. (H" x W" x D") | Approx. Ship Wt. |
|-----------|------------------|-------------------------------------|--------------|-----------------------------|------------------------------|------------------|
| LP2S★     | *                | 2 Cyl. Vertical Standard Door       | -            | (2) 20 or 33 lb. Cylinders  | 33 x 31 x 16                 | 54 lbs.          |
| LP4S      | *                | 4 Cyl. Horizontal Standard Door     | 2            | (4) 20 or 33 lb. Cylinders  | 33 x 30 x 32                 | 91               |
| LP6S      | *                | 6 Cyl. Horizontal Standard Door     | 2            | (6) 20 or 33 lb. Cylinders  | 33 x 43 x 32                 | 112              |
| LP8S      | *                | 8 Cyl. Horizontal Standard Door     | 4            | (8) 20 or 33 lb. Cylinders  | 65 x 30 x 32                 | 134              |
| LP12S     | *                | 12 Cyl. Horizontal Standard Door    | 4            | (12) 20 or 33 lb. Cylinders | 65 x 43 x 32                 | 169              |
| LP16S     | *                | 16 Cyl. Horizontal Standard 2-Door  | 4            | (16) 20 or 33 lb. Cylinders | 65 x 60 x 32                 | 234              |
| OG10S     | *                | 5-10 Cyl. Vertical Standard Door    | -            | Oxygen, Gas Cylinders       | 65 x 30 x 32                 | 115              |
| OG20S     | *                | 10-20 Cyl. Vertical Standard 2-Door | -            | Oxygen, Gas Cylinders       | 65 x 60 x 32                 | 194              |

All Models also available in Painted Steel Call 888-326-7890

# Aluminum Vertical LP Storage



★ Model #LPOGS

All LP units are available in **Vertical Storage Models** at no additional charge. Simply add "VERTICAL" to your PO. Vertical LP Storage Units comply with **CSAB 149.2, Canadian Standard for Liquid Propane Storage**.

SECURALL® also offers a comprehensive LP/OG Cylinder Storage Unit that allows for the storage of both horizontal AND vertical cylinders in a combination unit. Combo Unit stores up to 8 cylinders on reinforced 12-gauge aluminum racks or shelves and up to 10 cylinders vertically. They are made of the same high grade .125" thick aluminum and all-welded construction.

\* Full and Empty Cylinder labels sold separately.



Model #LP8S-VERTICAL

## OSHA Compliant

### CABINETS FOR STORING LP AND OXYGEN CYLINDERS VERTICALLY

| Model No.      | Test Lab Approv. | Description   | No. of Shelves | Capacity   | Exterior Dim. (H" x W" x D") | Approx. Ship Wt. |
|----------------|------------------|---|----------------|--|------------------------------|------------------|
| LP4S-VERTICAL  | *                | 4 Cyl. Vertical Standard Door                       | 1              | (4) 20 or 33 lb. Cylinders                         | 33 x 30 x 32                 | 86 lbs.          |
| LP6S-VERTICAL  | *                | 6 Cyl. Vertical Standard Door                       | 1              | (6) 20 or 33 lb. Cylinders                         | 33 x 43 x 32                 | 104              |
| LP8S-VERTICAL  | *                | 8 Cyl. Vertical Standard Door                       | 2              | (8) 20 or 33 lb. Cylinders                         | 65 x 30 x 32                 | 119              |
| LP12S-VERTICAL | *                | 12 Cyl. Vertical Standard Door                      | 2              | (12) 20 or 33 lb. Cylinders                        | 65 x 43 x 32                 | 145              |
| LP16S-VERTICAL | *                | 16 Cyl. Vertical Standard 2-Door                    | 2              | (16) 20 or 33 lb. Cylinders                        | 65 x 60 x 32                 | 204              |
| LPOGS★         | *                | 8 Cyl. Horizontal Storage, 10 Cyl. Vertical Storage | 2              | (8) 20 or 33 lb. Cylinders & Oxygen, Gas Cylinders | 65 x 60 x 32                 | 200              |

All Models also available in Painted Steel Call 888-326-7890

\* Complies with OSHA Regulations FM Factory Mutual Tested and Approved  
 - Designed in Accordance with Specifications set forth by the National Fire Protection Association

# Medical Gas Storage Cabinets

You can store your portable medical gas cylinders safely and in compliance with OSHA requirements. Securall® Oxygen Cylinder Storage Cabinets are designed to meet storage requirements for portable medical oxygen systems as set forth in:



Model #MG121  
(Shown with optional  
caster assembly - CA18)

*NFPA Code 99 - Health Care Facilities - 2018 Edition*  
*NFPA Code 101 - Life Safety - 2018 Edition*  
*NFPA Code 30 - Flammable and Combustible Liquids - 2018 Edition*  
*OSHA Regulations*



These lockable storage cabinets limit access to authorized personnel, protecting cylinders from theft, damage or tampering. The heavy-gauge, double-walled construction shields your cylinders from heat, sparks and flame, while separating them from flammable and combustible materials. Designed for D- and E-size cylinders up to 33-3/4" long x 4-1/4" diameter. Standard color is MG Green.

## CABINETS FOR STORING OXYGEN CYLINDERS



Model MG109

Model #MG121

| Model No.             | Door Style              | Cylinder Size | Cylinder Capacity                 | Dimensions HxWxD    | Approx. Ship Wt. |
|-----------------------|-------------------------|---------------|-----------------------------------|---------------------|------------------|
| <b>MG102</b>          | Manual                  | D, E          | 1-2                               | 44" x 14" x 9"      | 97 lbs.          |
| <b>MG102FL</b>        | Manual                  | D, E          | 1-2                               | 44" x 14" x 9"      | 112              |
| <b>MG104</b>          | Manual                  | D, E          | 2-4                               | 44" x 14" x 13 5/8" | 115              |
| <b>MG104FL</b>        | Manual                  | D, E          | 2-4                               | 44" x 14" x 13 5/8" | 135              |
| <b>MG304</b>          | Safe-T-Door             | D, E          | 2-4                               | 46" x 14" x 13 5/8" | 125              |
| <b>MG304FL</b>        | Safe-T-Door             | D, E          | 2-4                               | 46" x 14" x 13 5/8" | 145              |
| <b>MG109</b>          | Manual                  | D, E          | 9-12                              | 44" x 23" x 18"     | 170              |
| <b>MG109FL</b>        | Manual                  | D, E          | 9-12                              | 44" x 23" x 18"     | 199              |
| <b>MG309</b> *        | Safe-T-Door             | D, E          | 9-12                              | 46" x 23" x 18"     | 180              |
| <b>MG309FL</b>        | Safe-T-Door             | D, E          | 9-12                              | 46" x 23" x 18"     | 209              |
| <b>MG121</b>          | Manual                  | D, E          | 21-24                             | 44" x 43" x 18"     | 265              |
| <b>MG121FL</b>        | Manual                  | D, E          | 21-24                             | 44" x 43" x 18"     | 308              |
| <b>MG321</b>          | Safe-T-Door             | D, E          | 21-24                             | 46" x 43" x 18"     | 280              |
| <b>MG321FL</b>        | Safe-T-Door             | D, E          | 21-24                             | 46" x 43" x 18"     | 323              |
| <b>MG106H</b>         | Manual                  | H             | 6-9                               | 65" x 34" x 34"     | 372              |
| <b>MG106HFL</b>       | Manual                  | H             | 6-9                               | 65" x 34" x 34"     | 436              |
| <b>MG306H</b>         | Safe-T-Door             | H             | 6-9                               | 67" x 34" x 34"     | 394              |
| <b>MG306HFL</b>       | Safe-T-Door             | H             | 6-9                               | 67" x 34" x 34"     | 458              |
| <b>MG109H</b>         | Manual                  | H             | 9-12                              | 65" x 43" x 34"     | 443              |
| <b>MG109HFL</b>       | Manual                  | H             | 9-12                              | 65" x 43" x 34"     | 520              |
| <b>MG309H</b>         | Safe-T-Door             | H             | 9-12                              | 67" x 43" x 34"     | 550              |
| <b>MG309HFL</b>       | Safe-T-Door             | H             | 9-12                              | 67" x 43" x 34"     | 550              |
| <b>CA18-MGREEN</b>    | Caster for 18"D Cabinet |               | 2 Swivel, 2 Locking rigid casters |                     | 30 lbs.          |
| <b>CA34-MGREEN</b>    | Caster for 34"D Cabinet |               | 2 Swivel, 2 Locking rigid casters |                     | 35               |
| <b>MG Digital Pkg</b> | Digital Keypad Lock     |               | (Added upcharge)                  |                     | 5                |

**FL - Fire Lined with 3/4" Gypsum Panel Drywall**

## Cabinet Features



Flush Mounted Handle with  
Optional Digital Combination Lock



3-Point, Button  
Latch Closure



Non Sparking  
Dividers Hold  
Cylinders Upright

# Outdoor Weatherproof Flammable Storage



Model #A160WP1

SECURALL® Weatherproof cabinets offer the same dependable storage for flammables and combustibles as our standard safety cabinet line with added protection from the elements.

Double-wall cabinets are all-welded with 18-gauge construction using galvanized steel and painted with a weather-resistant, urethane finish that is also resistant to ultra-violet rays. All cabinets feature a sloped roof with a 2 3/4" overhang as well as interior and exterior astragals that prevent rain penetration, while the flush-mounted stainless steel locking handle resists corrosion. You can easily move these cabinets to the appropriate work location using built-in heavy gauge fork lift channels and secure them with fully-welded 7-gauge Bolt-Down Brackets, which have 7/8" diameter opening.

Cabinets are available in 30, 45, 60 and 90-gallon capacities with manual and self-closing door styles. Self-closing Safe-T-Doors have fusible links that melt at 165°F allowing the doors to automatically close and latch. Standard color is Yellow.

**Cabinets meet NFPA 40 CFR 264, 265, NFPA Code 30 & OSHA 1910 requirements.**



Model #A130WP1



Model #881  
High Security Hasp



Model #A130WP1MOD  
shown with  
High Security Handle


## Cabinet Features



Sloped Roof  
with 2 3/4"  
Overhang



Stainless Steel  
Flush-Mounted  
Handle



Fork Lift  
Channels w/  
Bolt-Down Bracket



3-Point, Non-  
Sparking, Self-  
Latching Closure



Astragals On  
Inside and  
Outside Of Doors

### CABINETS FOR STORING FLAMMABLES OUTDOORS

| Model No. | Test Lab Approv. | Description  | No. of Shelves | Exterior Dim. (H" x W" x D") | Approx. Ship Wt. | Addn'l Shelf | Approx. Ship Wt. |
|-----------|------------------|--|----------------|------------------------------|------------------|--------------|------------------|
| A130WP1   | *~               | 30 Gal. Weatherproof, Manual 2-Door                      | 1              | 48 x 43 x 18                 | 282 lbs.         | S2-05        | 12 lbs.          |
| A330WP1   | *~               | 30 Gal. Weatherproof, Self-Close, Self-Latch Safe-T-Door | 1              | 50 x 43 x 18                 | 302              | S2-05        | 12               |
| A145WP1   | *~               | 45 Gal. Weatherproof, Manual 2-Door                      | 2              | 69 x 43 x 18                 | 372              | S2-05        | 12               |
| A345WP1   | *~               | 45 Gal. Weatherproof, Self-Close, Self-Latch Safe-T-Door | 2              | 71 x 43 x 18                 | 392              | S2-05        | 12               |
| A160WP1   | *~               | 60 Gal. Weatherproof, Manual 2-Door                      | 2              | 69 x 31 x 31                 | 423              | S3-05        | 17               |
| A360WP1   | *~               | 60 Gal. Weatherproof, Self-Close, Self-Latch Safe-T-Door | 2              | 71 x 31 x 31                 | 445              | S3-05        | 17               |
| A190WP1   | *~               | 90 Gal. Weatherproof, Manual 2-Door                      | 2              | 69 x 43 x 31                 | 503              | S4-05        | 21               |
| A390WP1   | *~               | 90 Gal. Weatherproof, Self-Close, Self-Latch Safe-T-Door | 2              | 71 x 43 x 31                 | 532              | S4-05        | 21               |
| 881       |                  | High Security Handle with Hasp                           |                |                              |                  |              | 2                |

\* Complies with OSHA Regulations  
 ~ Designed in Accordance with Specifications set forth by the National Fire Protection Association  
 FM Factory Mutual Tested and Approved



# Industrial/Commercial Storage



Model #SS184



Model #SS172

You can easily organize, store and protect your valuable tools and materials with SECURALL® Industrial/Commercial storage cabinets.

- 18-gauge all-welded extra strength construction throughout.
- 18-gauge steel double wall doors.
- Each 18-gauge galvanized steel shelf can hold up to 500 lbs and is easily adjustable on 5" centers.
- 3-point self-latching doors have double wall construction.
- Full-length piano hinges and a lockable flush mounted door handle for obstruction free, fingertip operation.
- Shipped fully assembled and ready to use.
- Standard colors are Beige or Gray (Additional colors available).

## CABINETS FOR STORING INDUSTRIAL/COMMERCIAL SUPPLIES

| Model No. | Description                                      | No. of Shelves | Exterior Dim. (H" x W" x D") | Approx. Ship Wt. | Addn'l Shelf | Approx. Ship Wt. |
|-----------|--|----------------|------------------------------|------------------|--------------|------------------|
| SS142     | Self-Latch Standard 2-Door                       | 2              | 42 x 36 x 18                 | 151 lbs.         | SS-1-05      | 13 lbs.          |
| SS172     | Self-Latch Standard 2-Door                       | 4              | 72 x 36 x 18                 | 264              | SS-1-05      | 13               |
| SS184     | Self-Latch Standard 2-Door                       | 4              | 84 x 36 x 18                 | 300              | SS-1-05      | 13               |
| SS242     | Self-Latch Standard 2-Door                       | 2              | 42 x 36 x 24                 | 200              | SS-2-05      | 17               |
| SS272     | Self-Latch Standard 2-Door                       | 4              | 72 x 36 x 24                 | 353              | SS-2-05      | 17               |
| SS284     | Self-Latch Standard 2-Door                       | 4              | 84 x 36 x 24                 | 401              | SS-2-05      | 17               |
| SW242     | Self-Latch Standard 2-Door / Counter High Mobile | 2              | 47 x 36 x 24                 | 200              | SS-2-05      | 17               |

## Cabinet Features



18-Ga. Double Wall Doors



16-Ga. Welded Shelf Supports



Flush Mounted Door Handles



3-point Self-Latching Doors



18-Ga. Galvanized Adjustable Shelves

## Mobile Storage Cabinet



Model #SW242

Mobile Storage Cabinet Model comes equipped with two rigid and two swivel 4" locking casters (**factory installed**) and a sturdy push handle for easy mobility.

## CABINETS FOR STORING INDUSTRIAL/COMMERCIAL SUPPLIES

| Model No. | Description                                      | No. of Shelves | Exterior Dim. (H" x W" x D") | Approx. Ship Wt. | Addn'l Shelf | Approx. Ship Wt. |
|-----------|--|----------------|------------------------------|------------------|--------------|------------------|
| SW242     | Self-Latch Standard 2-Door / Counter High Mobile | 2              | 47 x 36 x 24                 | 200 lbs.         | SS-2-05      | 17 lbs.          |

# Stainless Steel Storage

## STAINLESS STEEL SAFETY CABINETS FOR FLAMMABLE AND COMBUSTIBLE LIQUIDS



All The same features as a standard safety cabinet in Stainless Steel.

- Perfect for Controlled Environments and Clean room applications such as Hospitals and Laboratories.
- Durable, 18-gauge stainless steel cabinets offer **Extra Strength From Superior Design & Workmanship.**
- All-welded cabinets feature double-wall construction with 1 ½” insulating airspace.
- 18-gauge stainless steel shelves are adjustable.
- Stainless steel vents feature a 2” opening in both interior and exterior walls.
- 2” leak-proof sill contains spills.
- Flush-mounted stainless steel locking door handle eliminates projecting obstacles.
- Cabinets come equipped with four adjustable, stainless steel legs and heavy gauge, stainless steel piano hinges.

**All cabinets Meet OSHA and NFPA Code 30 regulations.  
All Cabinet Models Listed are FM Approved.**



Model #A130-SS

Model #A331



### STAINLESS STEEL CABINETS FOR STORING FLAMMABLES

| Model No. | Test Lab | Description                                 | No. of Shelves | Exterior Dim. (H" x W" x D") | Approx. Ship Wt. | Addn'l Shelf | Approx. Ship Wt. |
|-----------|----------|---|----------------|------------------------------|------------------|--------------|------------------|
| A105-SS   | FM*~     | 12 Gal. Self-Latch, Standard Door           | 1              | 35 x 24 x 18                 | 185 lbs.         | S1-SS-05     | 5 lbs.           |
| A305-SS   | FM*~     | 12 Gal. Self-Close, Self-Latch, Safe-T-Door | 1              | 37 x 24 x 18                 | 195              | S1-SS-05     | 5                |
| A110-SS   | FM*~     | 16 Gal. Self-Latch, Standard Door           | 1              | 44 x 24 x 18                 | 217              | S1-SS-05     | 5                |
| A310-SS   | FM*~     | 16 Gal. Self-Close, Self-Latch, Safe-T-Door | 1              | 46 x 24 x 18                 | 227              | S1-SS-05     | 5                |
| A131-SS   | FM*~     | 30 Gal. Self-Latch, Standard, 2-Door        | 1              | 35 x 36 x 24                 | 291              | S15-SS-05    | 13               |
| A331-SS   | FM*~     | 30 Gal. Self-Close, Self-Latch, Safe-T-Door | 1              | 37 x 36 x 24                 | 306              | S15-SS-05    | 13               |
| A130-SS   | FM*~     | 30 Gal. Self-Latch, Standard, 2-Door        | 1              | 44 x 43 x 18                 | 325              | S2-SS-05     | 12               |
| A330-SS   | FM*~     | 30 Gal. Self-Close, Self-Latch, Safe-T-Door | 1              | 46 x 43 x 18                 | 345              | S2-SS-05     | 12               |
| A145-SS*  | FM*~     | 45 Gal. Self-Latch, Standard, 2-Door        | 2              | 65 x 43 x 18                 | 445              | S2-SS-05     | 12               |
| A345-SS   | FM*~     | 45 Gal. Self-Close, Self-Latch, Safe-T-Door | 2              | 67 x 43 x 18                 | 465              | S2-SS-05     | 12               |
| A160-SS   | FM*~     | 60 Gal. Self-Latch, Standard, 2-Door        | 2              | 65 x 31 x 31                 | 533              | S3-SS-05     | 17               |
| A360-SS   | FM*~     | 60 Gal. Self-Close, Self-Latch, Safe-T-Door | 2              | 67 x 31 x 31                 | 555              | S3-SS-05     | 17               |

Custom Sizes and Tops are available for Cleanroom application-call 888-326-7890

### Cabinet Features



Stainless Steel flush-mount Paddle Handle



3-Point self-Latching, Spring-Operated Button Latches

\* Complies with OSHA Regulations  
~ Designed in Accordance with Specifications set forth by the National Fire Protection Association

FM Factory Mutual Tested and Approved




# Customize to suit your needs

Custom Wire Glass



Custom sized cabinets are available in Galvannealed and Stainless Steel. Create any configuration 14”H x 12”W x 12”D or larger. 14” H minimum for paddle handle. Please provide dimensions and desired cabinet specifications to one of our Sales Representatives. Prices quoted on request.

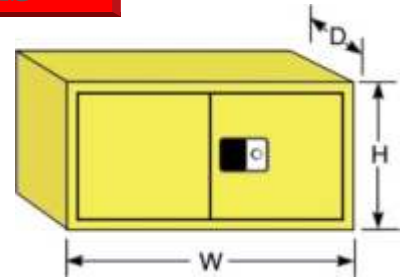

Custom Forklift Channels



## CUSTOM STORAGE

Choose from Options such as:

- Cabinet Color
  - Dimensions
  - Sump capacity
  - Sump Liners
  - Handle Type
  - Number of Doors
  - Door Closing Type
  - Dual Access
  - Number of Shelves
  - Shelf Capacity
  - Shelf Lining
  - Poly Trays
  - Labels
  - Tray Top
  - Wall Mount
  - Anchoring Brackets
  - Kick Recess
  - Leveling Legs
  - Forklift Channels
  - Casters
  - Stainless Steel
  - High Security Lock
  - Ventilation
  - Ground
  - Weatherproof Package
- Or whatever else you might need.



Custom Separation Walls & Shelvings

Speak to one of our Technical Sales Representatives for storage requirements and approved capacities.  
Call **888-326-7890** or visit us on the web at [www.secureallproducts.com](http://www.secureallproducts.com) and fill out a custom cabinet quote form.



Custom Designed



Custom Electrical Containment



Lock out Tag out



Custom Door Option



Custom side by Side Cabinet



Custom MedGas Cabinet



Custom LP Cabinet with Top Loading option



# HazMat Chemical Storage



Buildings are specifically designed for outdoor storage and dispensing from 55-gallon drums containing flammable or combustible liquids. Outer wall is constructed of welded 16 or 12-gauge steel. Inner wall is constructed of 20-gauge steel. Outdoor storage buildings are engineered with 3" airspace throughout and come standard with a commercial grade lockset handle.

All models are designed in accordance with the standards set forth by NFPA Code 30 and comply with OSHA and EPA regulations. All models are FM approved for the storing and dispensing of flammable and combustible liquids. Standard color is Gray.

## LOCKERS/BUILDINGS FOR STORING 55-GALLON DRUMS - outdoor and indoor application

| Model No. | Test Lab Approv. | Sump Capacity to Hold | Sump Capacity | Exterior Dim. H x W x D | Approx. Ship Wt. | Fire Rating Upgrade  |                       |            |                  |
|-----------|------------------|-----------------------|---------------|-------------------------|------------------|----------------------|-----------------------|------------|------------------|
|           |                  |                       |               |                         |                  | Two-Hour Fire Rating | Four-Hour Fire Rating |            |                  |
|           |                  |                       |               |                         |                  | Model No.            | Approx. Ship Wt.      | Model No.  | Approx. Ship Wt. |
| B200      | FM*~             | 2 55-Gal. Drums       | 55 Gal.       | 7' 5' 3'6"              | 1,281 lbs.       | OPFR2-200            | 1,298 lbs.            | OPFR4-200  | 1,722 lbs.       |
| B400      | FM*~             | 4 55-Gal. Drums       | 68            | 7' 5' 5'                | 1,748            | OPFR2-400            | 1,363                 | OPFR4-400  | 1,878            |
| B600      | FM*~             | 6 55-Gal. Drums       | 102           | 8'4" 7' 5'              | 2,061            | OPFR2-600            | 2,239                 | OPFR4-600  | 2,973            |
| B900      | FM*~             | 9 55-Gal. Drums       | 154           | 8'4" 7' 7'              | 2,567            | OPFR2-900            | 2,712                 | OPFR4-900  | 3,604            |
| B1200     | FM*~             | 12 55-Gal. Drums      | 206           | 8'4" 7' 9'              | 3,200            | OPFR2-1200           | 3,059                 | OPFR4-1200 | 4,108            |
| B1600     | FM*~             | 16 55-Gal. Drums      | 272           | 8'4" 10' 8'             | 5,515            | OPFR2-1600           | 3,253                 | OPFR4-1600 | 3,869            |
| B2400     | FM*~             | 24 55-Gal. Drums      | 393           | 8'4" 14' 8'             | 6,994            | OPFR2-2400           | 3,600                 | OPFR4-2400 | 5,107            |
| B3200     | FM*~             | 32 55-Gal. Drums      | 514           | 8'4" 18' 8'             | 8,652            | OPFR2-3200           | 4,356                 | OPFR4-3200 | 6,194            |
| B4800     | FM*~             | 48 55-Gal. Drums      | 757           | 8'4" 26' 8'             | 9,963            | OPFR2-4800           | 7,823                 | OPFR4-4800 | 10,322           |
| B6400     | FM*~             | 64 55-Gal. Drums      | 1,000         | 8'4" 34' 8'             | 12,851           | OPFR2-6400           | 9,616                 | OPFR4-6400 | 12,777           |
| B8000     | FM*~             | 80 55-Gal. Drums      | 1,243         | 8'4" 42' 8'             | 15,369           | OPFR2-8000           | 11,737                | OPFR4-8000 | 15,537           |

Best Seller!

\*Sizes 1600 and larger are constructed of 12-gauge Galvannealed Steel



Industry's 1st and Only FM Approved Fire Rated Wall & Roof Design Tested at Intertek Testing Laboratories

### EXPLOSION RELIEF PANEL

| Model No. | Description                   |
|-----------|-------------------------------|
| OGRP-200  | 1- 48" x 60"                  |
| OGRP-400  | 1- 48" x 60"                  |
| OGRP-600  | 1- 24" x 60" and 1- 48" x 60" |
| OGRP-900  | 1- 24" x 60" and 1- 48" x 60" |
| OGRP-1200 | 2- 48" x 60"                  |
| OGRP-1600 | 2- 48" x 60"                  |
| OGRP-2400 | 1- 24" x 60" and 2- 48" x 60" |
| OGRP-3200 | 3- 48" x 60"                  |
| OGRP-4800 | 4- 48" x 60"                  |
| OGRP-6400 | 5- 48" x 60"                  |
| OGRP-8000 | 6- 48" x 60"                  |

Securall® Fire-Rated Storage Buildings carry the Factory Mutual System Approval label and have an FM Approved Fire Rated Wall & Roof Design. Wall and Roof are Tested at Intertek Testing Laboratories. Securall® Fire-Rated Storage Buildings constructed based upon UL Fire Resistance Ratings classification criteria. Standard models are available with a 2-hour and 4-hour fire ratings upgrade. Wall ratings are either 2 or 4 hour fire rated. Roof ratings are either 1.5 or 3 hour fire rated (Check with your local authority having jurisdiction for correct wall/roof rating needed).



\* Model #B1600 shown with options and ramp

CUSTOM & SPECIAL OPTIONS call 888-326-7890 or Email



Fire Suppression System



Interior Shelving



Explosion Proof Lighting



Explosion Proof Heater



Explosion proof Air Conditioner

\* Complies with OSHA Regulations  
 - Designed in Accordance with Specifications set forth by the National Fire Protection Association

Best Seller!

# Agri-Chemical Storage

SECURALL® offers a complete line of safety storage buildings specifically designed for storing agricultural chemicals and equipment properly. All buildings are designed to help you comply with safety rules when mixing and handling pesticides, herbicides and other turf chemicals. These specially designed buildings are perfect for golf courses and nurseries.

SECURALL® Agri-Chemical Storage Buildings help reduce the risk of poisoning and injuries among pesticide handlers and agricultural employees. Also, the building will help you protect against chemical spills, child and animal poisonings and/or loss due to theft, fire and unauthorized personnel.

## Industry's 1st and Only FM Approved Fire Rated Wall & Roof Design Tested at Intertek Testing Laboratories



Securall® Fire-Rated Storage Buildings carry the Factory Mutual System Approval label and have an **FM approved Fire Rated Wall & Roof Design**. Wall and roof are tested at Intertek Testing Laboratories. Securall® Fire-Rated Storage Buildings are constructed based upon UL Fire Resistance Ratings classification criteria. Agri-Chemical Lockers/Buildings are available with a 2-hour or 4-hour fire ratings upgrade. Wall ratings are 2 or 4 hour fire rated. Roof ratings are 1.5 or 3 hour fire rated. Fire-rating is dependant on the proximity of the location of your outdoor storage Locker/Building to any adjacent building or property line. (Check with your local authority having jurisdiction for correct wall/roof rating needed).



Model #AG2400



Model #AG200

### LOCKERS/BUILDINGS FOR STORING CHEMICALS - outdoor and indoor application


| Model No. | Test Lab Approv. | Non-Rated          |               |                         |                  | Fire Rating Upgrade |                  |            |                  |
|-----------|------------------|--------------------|---------------|-------------------------|------------------|---------------------|------------------|------------|------------------|
|           |                  | Capacity           | Sump Capacity | Exterior Dim. H x W x D | Approx. Ship Wt. | Model No.           | Approx. Ship Wt. | Model No.  | Approx. Ship Wt. |
| AG200     | FM*              | 68.4 Cubic Feet    | 55 Gal.       | 7' 5' 3'6"              | 1,499 lbs.       | OPFR2-200           | 1,298 lbs.       | OPFR4-200  | 1,722 lbs.       |
| AG400     | FM*              | 145.1 Cubic Feet   | 68            | 7' 5' 5"                | 1,891            | OPFR2-400           | 1,363            | OPFR4-400  | 1,878            |
| AG600     | FM*              | 211.4 Cubic Feet   | 102           | 8'4" 7' 5"              | 2,331            | OPFR2-600           | 2,239            | OPFR4-600  | 2,973            |
| AG900     | FM*              | 308.1 Cubic Feet   | 154           | 8'4" 7' 7"              | 2,937            | OPFR2-900           | 2,712            | OPFR4-900  | 3,604            |
| AG1200    | FM*              | 404.7 Cubic Feet   | 206           | 8'4" 7' 9"              | 3,638            | OPFR2-1200          | 3,059            | OPFR4-1200 | 4,108            |
| *AG1600*  | FM*              | 524.1 Cubic Feet   | 272           | 8'4" 10' 8"             | 5,226            | OPFR2-1600          | 3,253            | OPFR4-1600 | 3,869            |
| *AG2400*  | FM*              | 747.7 Cubic Feet   | 393           | 8'4" 14' 8"             | 6,443            | OPFR2-2400          | 3,600            | OPFR4-2400 | 5,107            |
| *AG3200*  | FM*              | 971.3 Cubic Feet   | 514           | 8'4" 18' 8"             | 8,030            | OPFR2-3200          | 4,356            | OPFR4-3200 | 6,194            |
| *AG4800*  | FM*              | 1,418.5 Cubic Feet | 757           | 8'4" 26' 8"             | 10,566           | OPFR2-4800          | 7,823            | OPFR4-4800 | 10,322           |
| *AG6400*  | FM*              | 1,865.7 Cubic Feet | 1,000         | 8'4" 34' 8"             | 13,584           | OPFR2-6400          | 9,616            | OPFR4-6400 | 12,777           |
| AG8000    | FM*              | 2,313 Cubic Feet   | 1,243         | 8'4" 42' 8"             | 15,301           | OPFR2-8000          | 11,737           | OPFR4-8000 | 15,537           |

\*Sizes 1600 and larger are constructed of 12-gauge Galvannealed Steel


## Building Standard Features

- All Agri-Chemical storage buildings come with 3 tiers of shelving on 3 walls, Interior and Exterior lighting, a receptacle and load center
- AG200 has shelves on back wall only  
AG400 thru AG8000 have shelves on sides & back
- AG2400 and AG3200 have 2 Interior Lights  
AG4800 thru AG8000 have 3 Interior Lights
- AG200 thru AG1200 have 16-ga. Galvannealed Steel exterior  
AG1600 thru AG8000 have 12-ga. Galvannealed Steel exterior


# Outdoor Storage - Buildings & Lockers




**B200X**




**B400X**

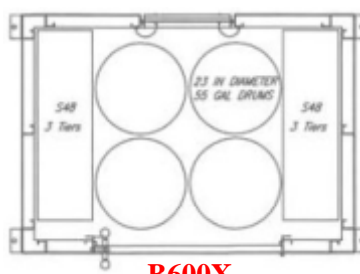


**B600X**




**B900X**




**B1200X**




**B1600X**

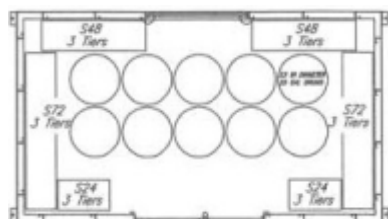


**B2400X**

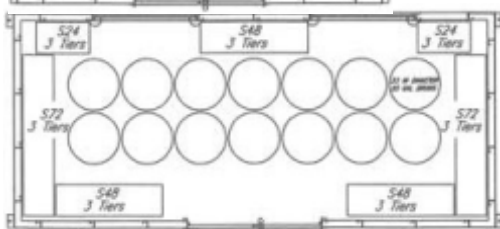


**B3200X**

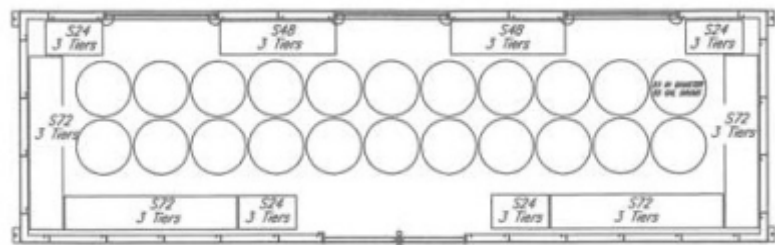

**B4800X**

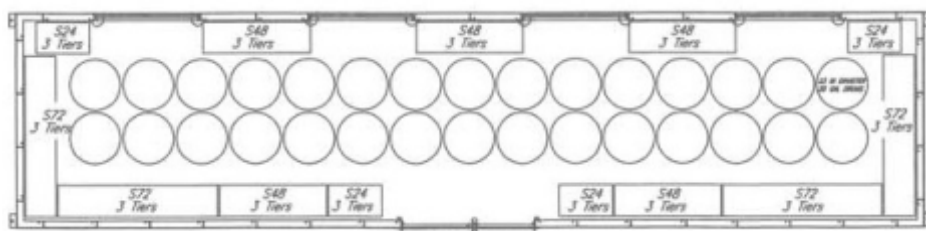

**B6400X**

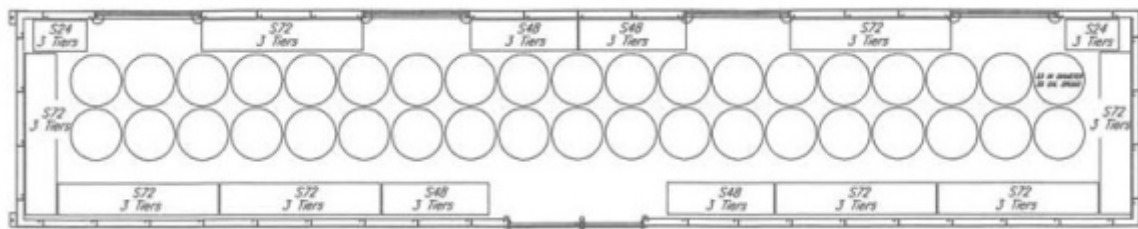

**B8000X**

## TOP 10 LIST Why You Should Purchase a SECURALL HAZ-MAT Storage Building

1. SECURALL® Storage Lockers & Buildings have double-wall construction.
  2. SECURALL® Storage Lockers & Buildings have inter-locking exterior wall sections that provide superior structural strength over conventional stud systems.
  3. SECURALL® Storage Lockers & Buildings have exterior walls and roof of galvannealed steel with a top-coat of chemical resistant urethane paint.
  4. SECURALL® HazMat Storage Lockers & Buildings feature an explosion relief panel in rear wall and are rated for storage and dispensing of Class 1A and 1B liquids.
  5. SECURALL® Storage Lockers & Buildings project a vision of quality with special features such as: galvanized shelves, aluminum thresholds, vents and electrical.
  6. SECURALL® Storage Lockers & Buildings are FM Approved\* and all electrical installations are UL Classified.
  7. Custom sizes are available as well as 2 and 4-Hour Fire Ratings.
  8. Short lead times on most standard buildings.
  9. Personalized customer service. Deal directly with the Sales Department and Design Engineering staff.
  10. SECURALL® has been providing the marketplace with the highest quality Safey Storage Products since 1965.
- ★ Shelving available at additional charge.

\* Complies with OSHA Regulations  
 FM Factory Mutual Tested and Approved  
 - Designed in Accordance with Specifications set forth by the National Fire Protection Association

# Building Accessories



OP001 & OP002



OP007



OP0010



OP0013



OP0020

## Explosion Proof Light

| Option No. | Description   | Applicable to building types: |
|------------|---|-------------------------------|
| OP0001     | Explosion-Proof Light w/ Switch (Interior)                                  | B                             |
| OP0001-A   | Additional Explosion-Proof Light (Interior)                                 | B                             |
| OP0002     | Explosion-Proof Light w/ Photocell (Exterior)                               | B                             |
| OP0002W/01 | Explosion-Proof Light w/ Photocell (Exterior in addition to Interior Light) | B                             |
| OP0003     | Dust/Vapor Resistant Light w/ Switch (Interior)                             | AG                            |
| OP0003-F   | Dust/Vapor Resistant Fluorescent Light w/ Switch (Interior)                 | AG                            |
| OP0004     | Dust/Vapor Resistant Light w/ Photocell (Exterior)                          | AG                            |
| OP0005     | Explosion-Proof Receptacle (Interior Only - NOT WEATHERPROOF)               | B                             |

## Explosion Proof Heater

| Option No.  | Description                                     | Applicable to building types: |
|-------------|---|-------------------------------|
| OP0006-6    | Explosion-Proof Heater (6,143 BTU)              | B / AG                        |
| OP0006-12   | Explosion-Proof Heater (12,286 BTU)             | B / AG                        |
| OP0006-25   | Explosion-Proof Heater (25,938 BTU)             | B / AG                        |
| OP0006-10FF | Explosion-Proof Heater, Fan Forced (10,000 BTU) | B / AG                        |
| OP0006-25FF | Explosion-Proof Heater, Fan Forced (25,600 BTU) | B / AG                        |
| OP0006-34FF | Explosion-Proof Heater, Fan Forced (34,100 BTU) | B / AG                        |

## Explosion Proof Air Conditioner

| Option No. | Description                                  | Applicable to building types: |
|------------|--|-------------------------------|
| OP0007-14  | Explosion-Proof Air Conditioner (14,000 BTU) | B / AG                        |
| OP0007-19  | Explosion-Proof Air Conditioner (19,000 BTU) | B / AG                        |

## Dry Chemical Fire Suppression System

| Option No. | Description   | Applicable to building types: |
|------------|---|-------------------------------|
| OP0010     | Dry Chemical Fire Suppression System (B200 - B1600)                 | B / AG                        |
| OP0010     | Dry Chemical Fire Suppression System (B2400 - B4800)                | B / AG                        |
| OP0010     | Dry Chemical Fire Suppression System (B6400 - B8000)                | B / AG                        |
| OP0010D    | Dry Chemical Fire Suppression System for Buildings 10' D or greater | B / AG                        |
| OP0010-ACT | Dry Chemical System Activation                                      | B / AG                        |
| OP0010-T   | Dry Chemical Alarm Tie-In   | B / AG                        |
| OP0010A    | Dry Chemical Alarm  | B / AG                        |
| OP0010S    | Dry Chemical Alarm w/ Strobe  | B / AG                        |


## Explosion Proof & Industrial Exhaust

| Option No. | Description  | Applicable to building types: |
|------------|--|-------------------------------|
| OP0013-343 | Explosion-Proof Exhaust w/ Indicator Light (343 CFM) | B                             |
| OP0013-388 | Explosion-Proof Exhaust w/ Indicator Light (388 CFM) | B                             |
| OP0013-600 | Explosion-Proof Exhaust w/ Indicator Light (600 CFM) | B                             |
| OP0013-900 | Explosion-Proof Exhaust w/ Indicator Light (900 CFM) | B                             |
| OP0013-A   | Alarm for Explosion-Proof Exhaust                    | B                             |
| OP0013-B   | Break Glass for Explosion-Proof Exhaust              | B                             |
| OP0020     | Industrial Exhaust                                   | AG                            |
| OP0020-1   | Industrial Exhaust (1,000 CFM)                       | AG                            |


# Building Accessories



OP0022



OP0015



OP0009



OP0005



OP0051



OP0061

## Personnel Single & Double Door

| Option No. | Description  | Applicable to building types: |
|------------|--|-------------------------------|
| OP0021-36  | Personnel Door (36"W x 80"H)                               | B / AG                        |
| OP0021-48  | Personnel Door (48"W x 80"H)                               | B / AG                        |
| OP0021-FR2 | Additional Double Door - 2 hour fire rated (60"W x 80"H)   | B / AG                        |
| OP0021-FR4 | Additional Double Door - 4 hour fire rated (60"W x 80"H)   | B / AG                        |
| OP0021-54  | Additional Double Door - 1 ½ hour fire rated (54"W x 80"H) | B / AG                        |
| OP0021-72  | Double Door - 1 ½ hour fire rated (72"W x 80"H)            | B / AG                        |
| OP0021-108 | Double Door (60"W x 108"H)                                 | B / AG                        |

## Portable Eyewash Station & Shelves

| Option No.  | Description                               | Applicable to building types: |
|-------------|---|-------------------------------|
| OP0025-6    | Portable Eyewash Station (6 Gal.)         | B / AG                        |
| OP0025-16   | Portable Eyewash Station (16 Gal.)        | B / AG                        |
| OP0022      | Shelves, 14"W w/ 2" Lip Sides             | B / AG                        |
| OP0022-16   | Shelves, 16"W w/ 1" Lip Sides             | B / AG                        |
| OP0022-25   | Shelves, 25"W w/ 2" Lip Sides             | B / AG                        |
| OP0022-WB   | Workbench (1/8" Aluminum)                 | B / AG                        |
| OP0022-WBSS | Workbench (Stainless Steel)               | B / AG                        |
| OP0022-LT   | Shelves, 14" w/ 2" Lip Sides (Leak Tight) | B / AG                        |

## Sump Drain Pan

| Option No.   | Description                                | Applicable to building types: |
|--------------|--|-------------------------------|
| OP0029       | Sump Drain Pan w/ Lockable Valve, 2" NPT   | B / AG                        |
| OP0029-1     | Sump Drain Pan w/ Lockable Valve, 1" NPT   | B / AG                        |
| OP0029-2.5   | Sump Drain Pan w/ Lockable Valve, 1 ½" NPT | B / AG                        |
| OP0029-D-2   | Sump Drain Pan only w/ 2" NPT              | B / AG                        |
| OP0029-D-1   | Sump Drain Pan only w/ 1" NPT              | B / AG                        |
| OP0029-D-1.5 | Sump Drain Pan only w/ 1 ½" NPT            | B / AG                        |


## Miscellaneous

| Option No. | Description   | Applicable to building types: |
|------------|---|-------------------------------|
| OP0009     | R-11 Insulation   | B / AG                        |
| OP0024-F   | Fiberglass Floor Grating  | B / AG                        |
| OP0024-GS  | Galvanized Steel Floor Grating  | B / AG                        |
| OP0027-2   | Bulkheads up to 2" Diameter O.D., Schedule 40                                   | B / AG                        |
| OP0027-20  | Bulkheads up to 20 x 12 Opening   | B / AG                        |
| OP0028     | Portable Fire Extinguisher  | B / AG                        |
| OP0031     | Primer Coat for Saltwater   | B / AG                        |
| OP0033-I   | Waterproof Recepticle (Interior)  | AG                            |
| OP0033-E   | Waterproof Recepticle (Exterior w/ Cover)                                       | B / AG                        |
| OP0034-NR  | Separation Wall/Sump Divider, 8ft Deep Bldg, Non-Fire Rated, Panel Construction | B / AG                        |
| OP0034-FR2 | Separation Wall/Sump Divider, 8ft Deep, 2 Hr Fire Rated, UL-U425 Design         | B / AG                        |
| OP0034-FR4 | Separation Wall/Sump Divider, 8ft Deep, 4 Hr Fire Rated, UL-U490 Design         | B / AG                        |
| OP0051     | Skylights (1 for 3200 & smaller, 2 for 4800 & larger)                           | B / AG                        |
| OP0054     | Flammables DOT Placard  | B / AG                        |
| OP0055     | Combustibles DOT Placard  | B / AG                        |
| OP0061     | Overhead Roll-Up Door   | B / AG                        |
| OP0063     | Ball Bearing Roller Option  | B / AG                        |
| OP0071     | Hurricane Proof Door Upgrade (80"H x 36"W)                                      | B / AG                        |
| OP0072     | Hurricane Proof Door Upgrade w/ Fire Rating (80"H x 36"W)                       | B / AG                        |
| OP0073     | Hurricane Proof Door Upgrade w/ Fire Rating (60"H x 80"W)                       | B / AG                        |

\* Complies with OSHA Regulations  
 ~ Designed in Accordance with Specifications set forth by the National Fire Protection Association

FM Factory Mutual Tested and Approved

# Building Ramps



Model #BR70

Ramps are compatible with both Hazardous Chemical and Agri-Chemical Storage Lockers.

## Ramps for Outdoor Storage Lockers & Buildings

| Model No.     | Description                            | Exterior Dim. W" x L" | Approx. Ship Wt. |
|---------------|--|-----------------------|------------------|
| <b>BR60</b> * | Steel Ramp w/ Skid-Resistant Finish    | 24 x 72               | 113 lbs.         |
| <b>BR60A</b>  | Aluminum Ramp w/ Skid-Resistant Finish | 24 x 72               | 49               |
| <b>BR65</b>   | Steel Ramp w/ Skid-Resistant Finish    | 40 x 88               | 315              |
| <b>BR65A</b>  | Aluminum Ramp w/ Skid-Resistant Finish | 40 x 88               | 130              |
| <b>BR70</b>   | Steel Ramp w/ Skid-Resistant Finish    | 44 x 88               | 325              |
| <b>BR75</b>   | Steel Ramp w/ Skid-Resistant Finish    | 48 x 88               | 335              |
| <b>BR80</b>   | Steel Ramp w/ Skid-Resistant Finish    | 52 x 72               | 331              |
| <b>BR90</b>   | Steel Ramp w/ Skid-Resistant Finish    | 60 x 72               | 343              |
| <b>BR95A</b>  | Aluminum Ramp w/ Skid-Resistant Finish | 48 x 96               | 355              |


# Heavy Duty Drum SpillStation

Built to provide a lifetime of service, these secondary containment drum stations provide an easy and safe solution to organizing hazardous waste in drums. Rugged, all-welded 12-gauge galvanized steel offers long term use. Our SpillStations are specifically designed to be used as a holding area for drums, dispensing station or waste collection center. All units feature removable 1" galvanized steel planking and forklift channels for easy mobility.



Model #DSS04

## Standard Capacities

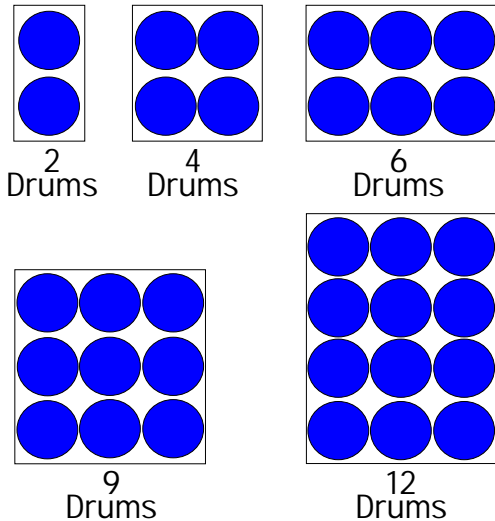

## Standard Features

- 12-gauge galvanized steel design.
- All-welded construction.
- Complies with EPA Spill Containment Requirements (40CFR264.175).
- Corrosive/ultraviolet resistant acrylic urethane.
- 11,000Lb. load capacity handles any application.
- Choose from 5 configurations.
- 1" removable galvanized steel floor planking.
- Forklift channels for easy mobility.
- Use indoors and outdoors.
- Optional ramp.

## Drum Spill Station

| Model No.     | Description      | Sump Capacity Gallons | Dimensions (H x W x D)in. | Load Capacity | Shp. Wt. Lbs. |
|---------------|------------------|-----------------------|---------------------------|---------------|---------------|
| <b>DSS02</b>  | Two Drum Unit    | 55                    | 9¼ x 27¼ x 56             | 2,500 Lbs.    | 289 lbs.      |
| <b>DSS04</b>  | Four Drum Unit   | 74                    | 9¼ x 51¼ x 56             | 5,000         | 430           |
| <b>DSS06</b>  | Six Drum Unit    | 109                   | 9¼ x 75¼ x 56             | 6,600         | 516           |
| <b>DSS09</b>  | Nine Drum Unit   | 156                   | 9¼ x 75¼ x 80             | 9,900         | 809           |
| <b>DSS12</b>  | Twelve Drum Unit | 201                   | 9¼ x 75¼ x 103            | 11,520        | 1,007         |
| <b>DSSR60</b> | Ramp             |                       | 9¼ x 24 x 72              |               | 113           |



## Flammable Storage Units are to be Used for the storage of:

OSHA 1910

106.8. Flammable liquid means any liquid having a flash point below 100°F (37.8°C) or higher, the total of which make up 99 percent or more of the total volume of the mixture. Flammable liquids shall be known as Class I liquids. Class I liquids are divided into three classes as follows:

Class IA shall include liquids having flash points below 73°F (22.8°C) and having a boiling point below 100°F (37.8°C).

Class IB shall include liquids having flash points below 73°F (22.8°C) and having a boiling point at or above 100°F (37.8°C).


### NFPA Flammable and Combustible Classes

| Flammables          | Flash Point                        | Boiling Point   |
|---------------------|------------------------------------|-----------------|
| Class IA            | <73°F (22.8°C)                     | <100°F (37.8°C) |
| Class IB            | <73°F (22.8°C)                     | ≥100°F (37.8°C) |
| Class IC            | ≥73°F (22.8°C) and <100°F (37.8°C) | -               |
| <b>Combustibles</b> |                                    |                 |
| Class II            | ≥100°F (37.8°C) and <140°F (60°C)  | -               |
| Class IIIA          | ≥140°F (60°C) and <200°F (93°C)    | -               |
| Class IIIB          | ≥200°F (93°C)                      | -               |

*Based on NFPA Code 30*

It should be mentioned that flash point was selected as the basis for classification of flammable and combustible liquids because it is directly related to a liquid's ability to generate vapor, i.e., its volatility. Since it is the vapor of the liquid, not the liquid itself, that burns, vapor generation becomes the primary factor in determining the fire hazard. The expression "low flash - high hazard" applies. Liquids having flash points below ambient storage temperatures generally display a rapid rate of flame spread over the surface of the liquid, since it is not necessary for the heat of the fire to expend its energy in heating the liquid to generate more vapor.

## A Compliant Cabinet Must Have:

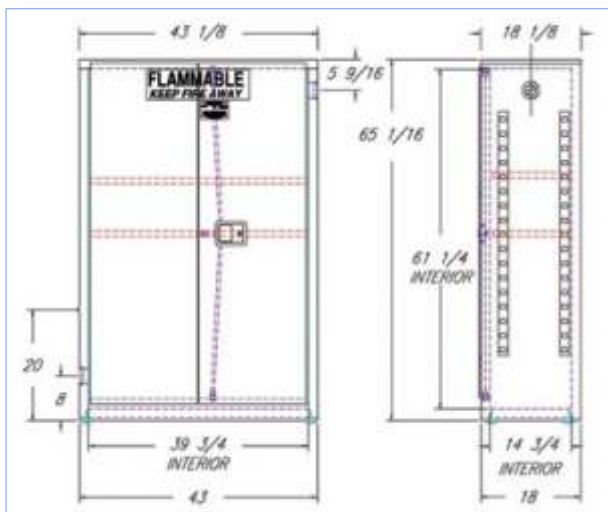

### Required Features:

- Reinforced 18-gauge construction.
- Top, bottom, sides, back and doors - double wall construction with 1 1/2" air space.
- Leak proof sill 2" deep.
- Two vents with flash arrestors.
- Non-sparking, 3-point self-latching doors.
- Adjustable leveling legs.
- Locking handle.
- Static grounding bolt OSHA compliant.
- Large Warning label.



**18-gauge double wall construction & seamed joints**

### **OSHA 1910**

1910.106(d)(3)(ii)(a). The bottom, top, door, and sides of cabinet shall be at least No. 18-gauge sheet iron and double walled . . . Joints shall be riveted, welded or made tight by some equally effective means.

### **NFPA 30**

6.3.3.2.a. The bottom, top, door, and sides of the cabinet shall be at least No. 18-gauge sheet steel

6.3.3.2.b. Joints shall be riveted, welded, or made tight by some equally effective means.

### **FM 6050**

3.2.1. Cabinets shall be of double wall steel or single wall wood construction. . . Steel thickness shall not be less than 18-gauge Seams and joints shall be secured by riveting, welding, brazing, or some equally effective means.



**1 1/2" airspace throughout cabinet body**

### **OSHA 1910**

1910.106(d)(3)(ii)(a). Metal cabinets constructed in the following manner shall be deemed to be in compliance. The bottom, top, door, and sides of cabinet shall be . . .double walled with 1 1/2 - inch air space.

### **NFPA 30**

6.3.3.2.a. The bottom, top, door, and sides of the cabinet . . . shall be double-walled, with 38 mm (1 1/2 in.) air space.

### **FM 6050**

3.2.1.A. Cabinets shall be of double wall steel. . . Walls, top, and door(s) shall have a gap of not less than 1 1/2 in. (38 mm) between the inner and outer panels. . . Nonflammable insulation may be placed within the gap.



**Leak Proof Sill 2" Deep, Prevents Leakage in the Event of Accidental Spills**

### **OSHA 1910**

1910.106(d)(3)(ii)(a) . . .The door sill shall be raised at least 2 inches above the bottom of the cabinet.

### **NFPA 30**

6.3.3.2.c. The doorsill shall be raised at least 50 mm (2 in.) above the bottom of the cabinet to retain spilled liquid within the cabinet.

### **FM 6050**

3.2.1.C. Cabinets shall be equipped with a leak-tight spill containment sump or pan not less than 2 in. (51 mm) deep.



**Non-sparking closure w/ 3-Point, Self-Latching Doors**

### **OSHA 1910**

1910.106(d)(3)(ii)(a) The door shall be provided with a three-point lock

### **NFPA 30**

6.3.3.2.c. The door shall be provided with a three-point latch arrangement.

### **FM 6050**

3.2.1.B. Door(s) of the cabinet shall be equipped with a lockable, non-sparking, three-point latching mechanism.



# Code Compliance



**Self-Closing Mechanism segregated from interior of cabinet and contents stored**

## *OSHA 1910*

106(e)(6)(i) "General." Adequate precautions shall be taken to prevent the ignition of flammable vapors. Sources of ignition include but are not limited to open flames; lightning; smoking; cutting and welding; hot surfaces; frictional heat; static, electrical, and mechanical sparks;



**Fusible Link Assembly on Self-Closing Models**

## *FM 6050*

3.2.1.F. . . . If a means for holding the door(s) open is provided, this device shall automatically release the doors in the event of a fire or exposure to excessive heat. The device shall release the closing mechanism when exposed to a temperature of 212°F (100°C) or less.

## *OSHA 1910*

307(c)(3). Safe for the hazardous (classified) location . . . Note: The National Electrical Code, NFPA 70, contains guidelines for determining the type and design of equipment and installations which will meet this requirement. The guidelines of this document address electric wiring, equipment, and systems installed in hazardous (classified) locations and contain specific provisions for the following: (including). . Grounding.



**Static Ground Connections**

## *NFPA 70*

ARTICLE 250.8. Grounding conductors and bonding jumpers shall be connected by exothermic welding, listed pressure connectors, listed clamps, or other listed means. . . Sheet metal screws shall not be used to connect grounding conductors or connection devices to enclosures.

## *FM 6050*

3.2.1.E. A means shall be provided for attaching a separate grounding wire to the exterior of the cabinet. The attachment means shall be such that the cabinet finish does not interfere with the establishment of a proper ground.

## *OSHA 1910*

1910.106(d)(3)(ii). Cabinets shall be labeled in conspicuous lettering, "Flammable - Keep Fire Away."

## *FM 6050*

3.3.1. Cabinets shall, as a minimum, be labeled with the manufacturer's name, address, model number, and maximum liquid storage capacity.


3.3.2. All Approved cabinets shall be labeled with an FM Approval Mark

3.3.3. Cabinets shall be labeled with the conspicuous legend: FLAMMABLES – KEEP FIRE AWAY.

3.3.4. All markings shall be legible and durable.



**Bold, clear labeling**



**Adjustable Leveling Legs**

## *FM 6050*

3.4. The manufacturer shall provide instructions pertaining to proper leveling of the cabinet



**Locking Handle**

## *OSHA 1910*

1910.106(d)(3)(ii)(a). The door shall be provided with a three-point lock

## *FM 6050*

3.2.1.B. Door(s) of the cabinet shall be equipped with a lockable, non-sparking, three-point latching mechanism.



## Recognize your needs before they become your faults

### What are Outdoor Storage Lockers/Buildings used for?

SECURALL® Outdoor Storage lockers/buildings are used to store Hazardous Materials, Flammables, Pesticides, Herbicides and other Agri-chemicals in a safe, secure storage area. Each product is equipped with a sump area designed to prevent leaky containers from contaminating the area.

### Which materials require storage in a Locker/Building?

All Flammable & Combustible Liquids in an outside location must be stored in a designated storage unit. Other hazardous materials stored outside that may leak and cause contamination should also be stored in a designated storage unit. SECURALL® Outdoor Storage Lockers/Buildings are approved for storage of flammable & combustible liquids, except for storage of Class 1A and dispensing of Class 1A and 1B Flammable Liquids (refer to NFPA Code 30). Explosion relief is required for buildings storing and dispensing Class 1A and 1B Flammable Liquids.

Securall® Haz-mat storage units come standard with Explosion Relief to meet this criterion. All standard models are FM Approved.



### What is the difference between a Locker and a Building?

Lockers are used to store a quantity of chemicals that do not exceed the control area. Quantities of chemicals that exceed the control area require a Building for storage. Lockers are also less likely to be subject to State Approvals. Check with your local Authority having jurisdiction.



### Can I store several different chemicals in the same Locker/Building?

You should classify the chemicals you intend to store according to hazard. Those that are compatible can be stored in the same outdoor storage unit. Incompatible chemicals should be stored in separate outdoor storage units or as required by OSHA.

### How should I store incompatible materials?

Outdoor storage units can be designed with a separation wall allowing you to store incompatible materials. Safety cabinets can also be installed inside the locker or building to separate the different materials. Contact your local Authority having jurisdiction to determine the appropriate solution for your situation.

## Code Compliance

To help you store and dispense hazardous materials in a safe and efficient manner SECURALL® Safety Storage Buildings are designed to meet or exceed the following BUILDING CODES, INDUSTRY CONSTRUCTION STANDARDS and FEDERAL REGULATIONS:

### Codes

UBC - Uniform Building Code  
SBC - Southern Building Code  
UFC - Uniform Fire Code  
NEC - National Electric Code  
CAC - California Administrative Code

### Standards

NFPA - National Fire Protection Association  
BOCA - Building Officials & Code Administrators  
AWS - American Welding Society  
AISC - American Institute Of Steel Construction  
ANSI - American National Standard Institute  
ASTM - American Society For Testing & Material  
USPC - United States Product Code  
ICC - International Code Council

### Regulation

EPA - Environmental Protection Agency Regulations  
OSHA - Occupational Safety & Health Act Regulations.

### Where should outdoor storage units be placed?

SECURALL® Outdoor Storage units should be placed outside on level ground or on a concrete slab. Consult your local Authority having jurisdiction regarding building separation distances and limits.

### Which construction standards are relevant to Outdoor Storage Lockers/Buildings?

The following Building Codes are met: UBC, SBC, UFC, NEC and CAC. The following Industry Construction Standards are met: NFPA, BOCA, AWS, AISC, ANSI, ASTM, ICC and USPC. The following Federal Regulations are pertinent: EPA and OSHA.

### What size Locker/Building do I need? For any

Outdoor For any Outdoor Safety Storage unit, the storage capacity is ultimately determined by the capacity of the sump. OSHA requires sump capacity to contain 25% of the total holding capacity or 100% of the largest container whichever is greater; so if we were to measure by how many 55 - gallon drums you want to store in a locker/building, SECURALL® has standard sizes for 2, 4, 6, 9, 12, 16, 24, 32, 48, 64 and 80 - drum sump capacity. You can also custom-design the building by specifying the height, width and depth of the storage unit yourself.

### Is there a maximum size for a Locker/Building?

Floor area should not exceed 1500 square feet.

# Custom Storage Buildings

DESIGN & FABRICATION



\* Complies with OSHA Regulations  
FM Factory Mutual Tested and Approved  
- Designed in Accordance with Specifications set forth by the National Fire Protection Association

★ Best Seller!

27



**SECURALL PRODUCTS**  
Are manufactured in the U.S.A.



FOB: LaPorte, IN 46350

**securall**

Manufactured By  
A & A Sheet Metal Products  
5122 N. State Road 39  
P.O. Box 1848

La Porte, IN 46352-1848  
Phone 1-888-326-7890  
Fax 1-888-324-3780

Email [sales@securallproducts.com](mailto:sales@securallproducts.com)

[securallproducts.com](http://securallproducts.com)

